
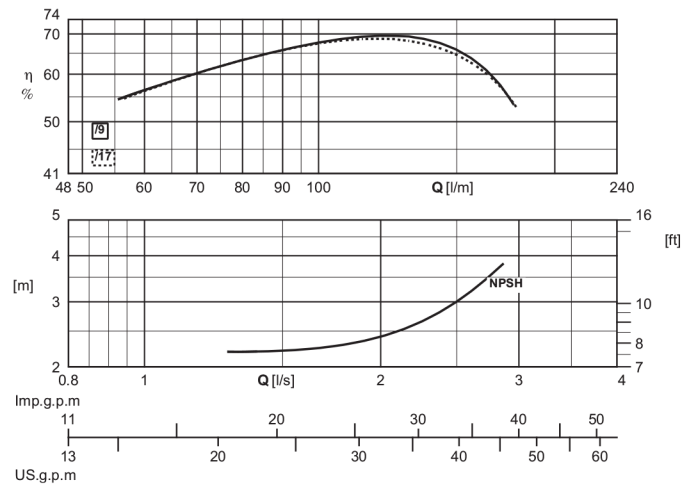


Type Type Tipo	Ø max [mm]	Weight Poids Peso [kg]	A	B	C	D	E	F
			[mm]					
E4XED40/6+MC41	98	12,5	748,5	408,5	340	93	96	G2
E4XED40/9+MCH415	98	14,6	941	521	420	93	96	G2
E4XED40/12+MCH42	98	16,1	1080,5	633,5	447	93	96	G2
E4XED40/17+MCH43	98	19,3	1323,5	848,5	475	93	96	G2
E4XED40/23+MCH44	98	23,4	1588,5	1073,5	515	93	96	G2

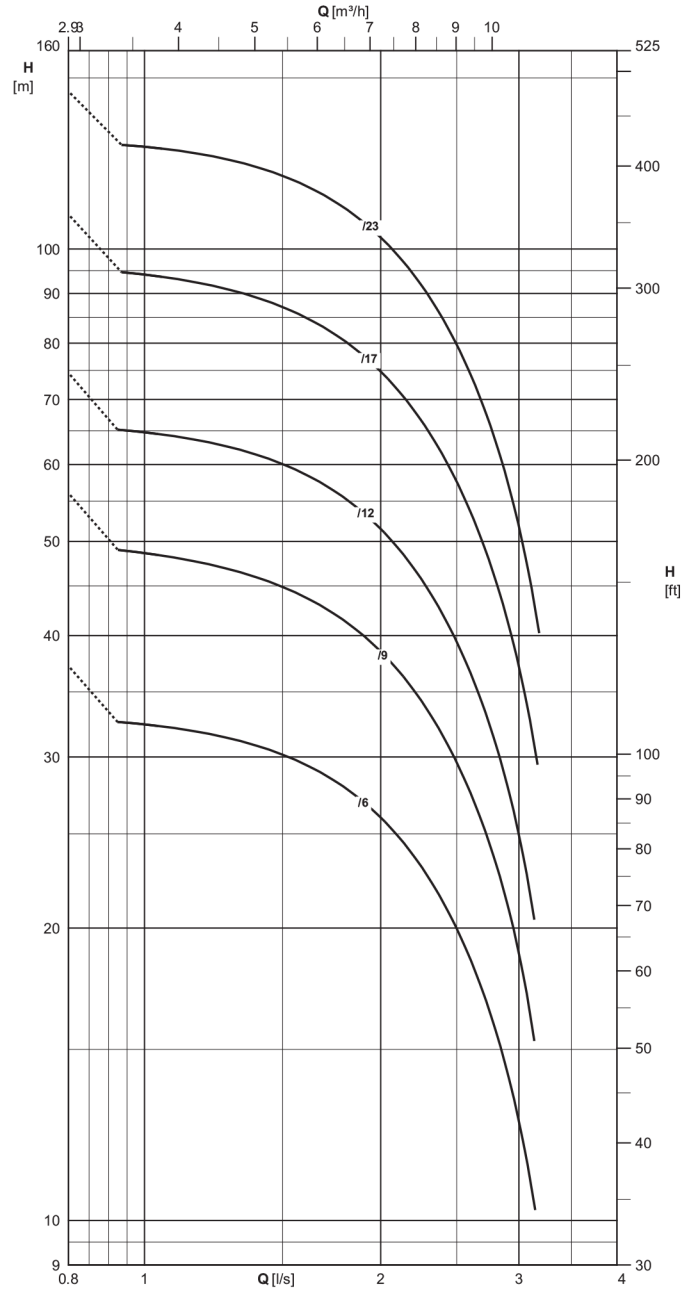

The hydraulic performance characteristics are guaranteed as conforming to standard UNI/ISO 9906 Grade 3B.

Les caractéristiques hydrauliques de fonctionnement sont garanties conformes à la norme UNI/ISO 9906 Niveau 3B.

Le caratteristiche di funzionamento vengono garantite secondo la norma: UNI/ISO 9906 Grado 3B.